
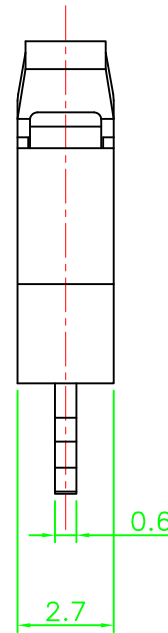


CONTACT CONFIGURATION



SPECIFICATION

1. RATING : 6V DC, 0.3A Max.
2. CONTACT RESIS' : 200mΩ Max.
3. OPERATING FORCE : 60gf Max.
4. RELEASE FORCE : 3gf Min.
5. PRETRAVEL : 2.5mm Max.
6. OVER TRAVEL : 0.15mm Min.
7. DIFFERENTIAL TRAVEL : 1mm Max.
8. OPERATING POSITION(OP) : 7 ±0.4 mm.
9. FREE POSITION(FP) : 9.6mm Max.
10. LIFE : 10,000 OPERATION Min.
11. TOLERANCE : ±0.3mm.

											MS-122	
PART NO.		MODEL			MATERIAL		SPECIFICATION		TREATMENT		REFERENCE	
					TRIGONO -METRY		UNIT m/m		SCALE		USER	
					APPROVAL		CHECK		DESIGN		TITLE	
					JUNG		LEE		2008.05.14		PMS122SS	
MARK	DATE	APPR.	CHECK	DESIGN	2008.05.14		2008.05.14		DWG NO.			