

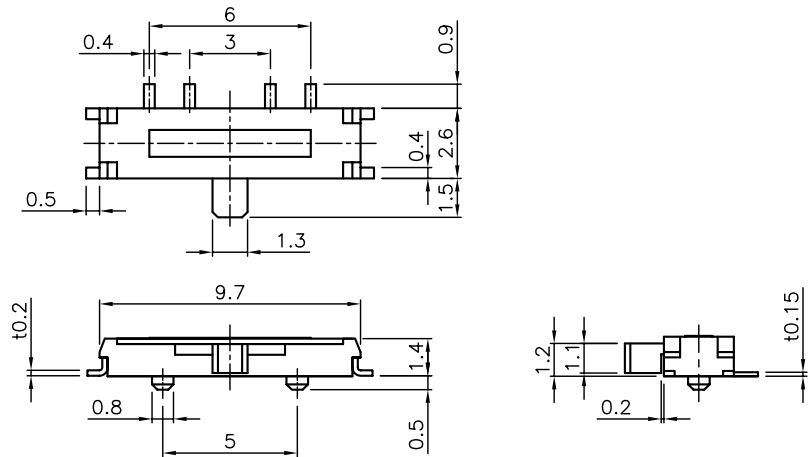


SSS130




Description		Model	SSS130SS
Operating Force (gf)			Side → Center : 150±100, Center → Side : 200±150
Poles – Throws			1C - 3P
Life Cycle (min)			10,000
Rating (max)			0.3A, 6V DC
Stroke (mm)			1.5 + 1.5
Timing			Not specified
Contact Resistance			70 mΩ max
Features			Miniature side SMD, Reflow soldering, Ground
Packaging	Bulk		1,000 pcs / Bag
	Reel		3,500 pcs / Reel

P.C.B Layout

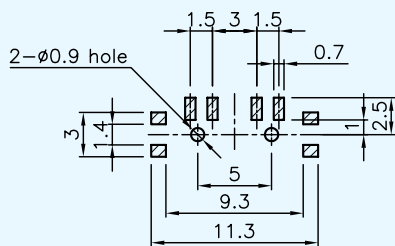

Circuit Diagram



Tape Packaging

