




CIRCUIT DIAGRAM




P.C.B. LAND PATTERN

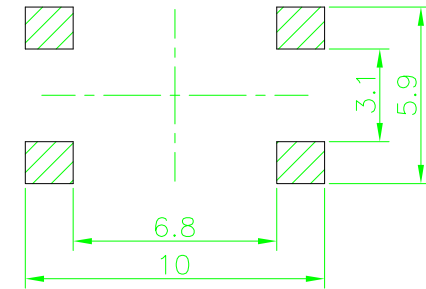

SPECIFICATION

1. RATING : 12V DC, 50mA Max.
2. STROKE : 0.25±0.1
3. CONTACT RESISTANCE : 100mΩ Max.
4. OPERATING FORCE : 200±50gf.
5. BOUNCE : 5msec Max.
6. LIFE : 100,000 Cycles Min.
7. TOLERANCE : ±0.2

							TS-V-042		
							TS-R-024		
PART NO.		MODEL		MATERIAL		SPECIFICATION		TREATMENT	REFERENCE
					TRIGONO-METRY	UNIT	SCALE	USER	TACT SWITCH
					APPROVAL	CHECK	DESIGN	TITLE	STM255SW
							M. K. JUNG 2005.4.11	DWG NO.	
MARK	DATE	APPR.	CHECK	DESIGN					